
#### Please be advised Thaler products may undergo improvements from time to time and are subject to change without notice.

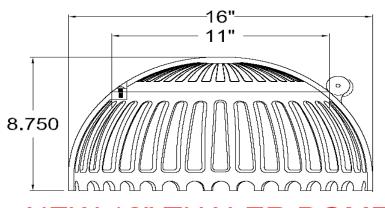

# NEW 16" THALER DOME

# SPECIFICATION (Short Form)

**Roof drains:** Thaler RD-7A-8 or RD-7A-10 aluminum big roof drain for [8" (203 mm)] [10" (254mm)] leader size; with: vandalproof cast aluminum dome with hinged access gate welded to cast aluminum ring ; .090" (2.3 mm) aluminum drain body, deck flange and straight aluminum outlet with aluminum ferrule; eight 3/8" (9 mm) aluminum bolts welded to underbody reinforcement discs; [T-5 aluminum sediment collar;] [T-10 stainless steel underdeck clamp;] [T-12 perforated 22 ga. (0.76 mm) s.s. ballast guard;] [PVC coated deck flange] [bituminous painted deck flange]; manufactured by Thaler Metal Industries, 1-800-387-7217 (Mississauga, Ontario, Canada) or 1-800-576-1200 (Niagara Falls, NY), installed as per manufacturer's written instructions. Provide standard 20 year warranty against defects in materials and/or manufacture.

ROOF SPECIALTIES RD-7A-8 RD-7A-10 VANDALPROOF BIG ALUMINUM ROOF DRAIN (All Purpose, Straight Outlet) Also Available in Copper, Stainless, and for Re-roofing

# **NEW CONSTRUCTION**



### RD-7A-8 or RD-7A-10 VANDALPROOF ALUMINUM ROOF DRAIN FOR 8" (203 mm) & 10" (254mm) LEADER SIZE





# ALSO AVAILABLE IN COPPER AND STAINLESS STEEL



RD-7SS-8 or RD-7SS-10 VANDALPROOF ALUMINUM ROOF DRAIN FOR 8" (203 mm) & 10" (254mm) LEADER SIZE

#### Material Specification for RD-7C-8 or RD-7C-10 (Copper) and RD-7SS-8 or RD-7SS-10 (Stainless Steel) Roof Drains

Diality											
Drain Type	16" Dome Strainer with Clamping Ring	Drain Body and Base	Bolts and Nuts	Ferrule	T=5 Sediment Collar	T-10 Underdeck Clamp	T-12 Ballast Guard				
RD-7A-8 RD-7A-10	Cast Aluminum	Aluminum 0.090" (2.3 mm)	Alum[num	Alum[num	Aluminum	Stajnless Steel	Stainless Steel				
RD-7C-8 RD-7C-10	Cast Aluminum	Copper base: 24 oz. 0.032" (0.813mm) p[pe: DWV 0.058" (1.47mm)	Stainless Steel	Brass	Copper	Stainless Steel	Stainless Steel				
RD-7SS-8 RD-7SS-10	Cast Aluminum	Stainless Steel base: 22 Ga. (0.8mm) pipe: 304 L 0.12" (3mm)	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel				





Drain Type	16" Dome Strainer with Clamping Ring	Drain Body and Base	Bolts and Nuts	I-5 SedIment Co <mark>ll</mark> ar	Underdeck Clamp	Ballast Guard
RD-7A-RR-8 RD-7A-RR10	Cast Aluminum	Aluminum 0.090" (2.3 mm)	Aluminum	Aluminum	Sta[n ess Steel	Staīnless Steel
RD-7C-RR-8 RD-7C-RR-10	Cast Aluminum	Copper base: 24 oz. 0.032" (0.813mm) pipe: DWV 0.058" (1.47mm)	Stainless Steel	Copper	Stainless Steel	Staīnless Steel
RD-7SS-RR-8 RD-7SS-RR-10	6	Stainless Steel base: 22 Ga. (0.8mm) pipe: 304 L 0.12" (3mm)	Stainless Steel	Stainless Steel	Sta[n ess Steel	Staīnless Steel